


Control Box CB6S MK2

Data Sheet

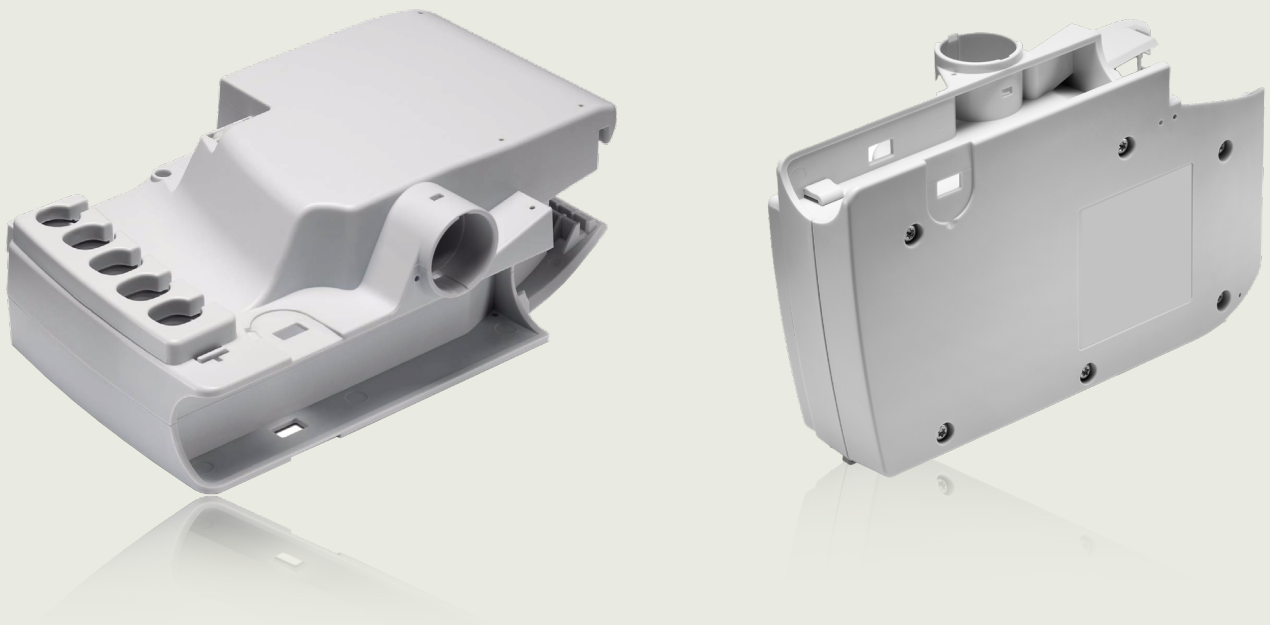

Contents

Introduction..... 3

Features and options 4

Ordering example 6

System overview..... 7

Dimensions 8

Mounting..... 9

Introduction



The CB6S MK2 is part of the LINAK OpenBus™ product range that provides more flexible solutions no matter which actuator concept is preferred.

It is a powerful control box with Switch Mode Power Supply (SMPS) which is typically used for applications like hospital beds, couches/tables for treatment and examination and other medical applications.

The universal SMPS makes the control box adaptable to the worldwide market irrespective of the input voltage.

Easy troubleshooting and the possibility for read-out of lifetime actuator information and battery state on a laptop via Service Data Tool (SDT).

With the CB6S MK2 you get more benefits such as:

- Universal SMPS covering from 100-240 VAC
- 200 W powerful SMPS with full software power management
- Exchangeable mains cables for worldwide compatibility
- Easy documentation of service visits with Service Data Tool (SDT)
- SMPS saves weight
- Easy software configuration in SoftCon2

Features and options

Power supply:	SMPS Universal: 200 W, 100-240 VAC 50/60 Hz
Standby current consumption, SMPS:	Approx. 0.8 W (230 V)
Channels:	4
Varistor:	For input voltage protection
Colour:	Light grey (RAL7035)
Weight:	700 g
Battery charger:	Yes
Charging indicator:	Supported
Battery alarm:	Yes, at medium battery level (19.6 V)
EOP:	Implemented in standard software
Housing type:	V-0
IP rating:	IPX6
Operation:	Real parallel (feedback possible)
Max. current, total:	10 A (EOP supported)
µ-processor:	128 kB (supports more complex software, for instance true parallel operation, feedback is possible)
Management:	With full software power management
Speed control:	Possible with special software (common for all channels)
Start/stop:	Soft start/direct stop
Light background:	Background light in hand controls supported (Vpermanent)
Control concept:	Relays (fully software-controlled EAS protection)
Service monitor:	Yes, supported
External battery connection (BA18):	Capacity: 1.3 Ah, must be ordered separately
Accessories:	OpenBus™ accessories

Usage

Operating temperature: +5 °C to +40 °C

Storage temperature: -10 °C to +50 °C

Relative humidity: 20% to 80% - non-condensing

Atmospheric pressure: 700 to 1060 hPa


Meters above sea level: Max. 3000 meters

Mains supply grid should be limited to the highest prospective short circuit current of 1500 A.

Demands to mains supply safety for the application in accordance with IEC 60601-1 ed. 3.2, § 8.11.5

Approvals: IEC 60601-1
ANSI/AAMI ES 60601-1
CAN/CSA-C22.2 No. 60601-1, Australian, Canadian deviation

Ordering example

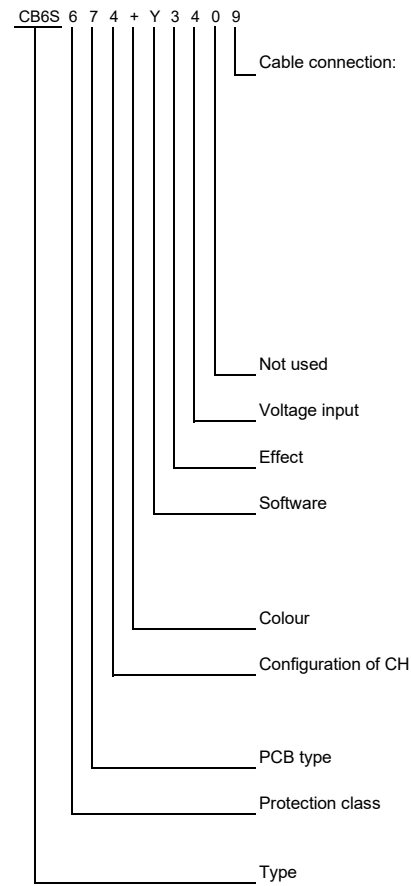

Mains cable 2P:		Mains cable 3P with earth:	
0	Straight cable EU	A	Straight cable EU
1	Coiled cable EU	B	Coiled cable EU
2		C	
3	Straight cable UK	D	Straight cable UK
4	Straight cable JAPAN	E	
5	Straight cable UL	F	Straight cable UL
6		G	Straight cable CH
7	Straight cable AUS	H	Straight cable AUS
8		I	
9	Without cable	J	Without cable See note 1
		K	Coiled cable DK


- 4 => 100 to 240 V 50/60 Hz intern SMPS
- 3 => SMPS characteristic 200 W
- T => Test software for entrance control
- Y => Special software package
- N => Standard software package with same functionas Z-SW for OBF
- M => Standard software package with same function as L-SW for OBMe
- + => Plastics RAL 7035 (light grey)
- 4 => CH 1->4
- 3 => CH 1, 2, 3
- 2 => CH 1, 2
- 7 => MK2 (OBMe) with external battery backup/internal SMPS
- 6 => IPx6

Control box CB6S MK2


Notes

*1 Class 1 (Earth connection outside the control box and 3-wire mains cable with pig-tail needed)

System overview

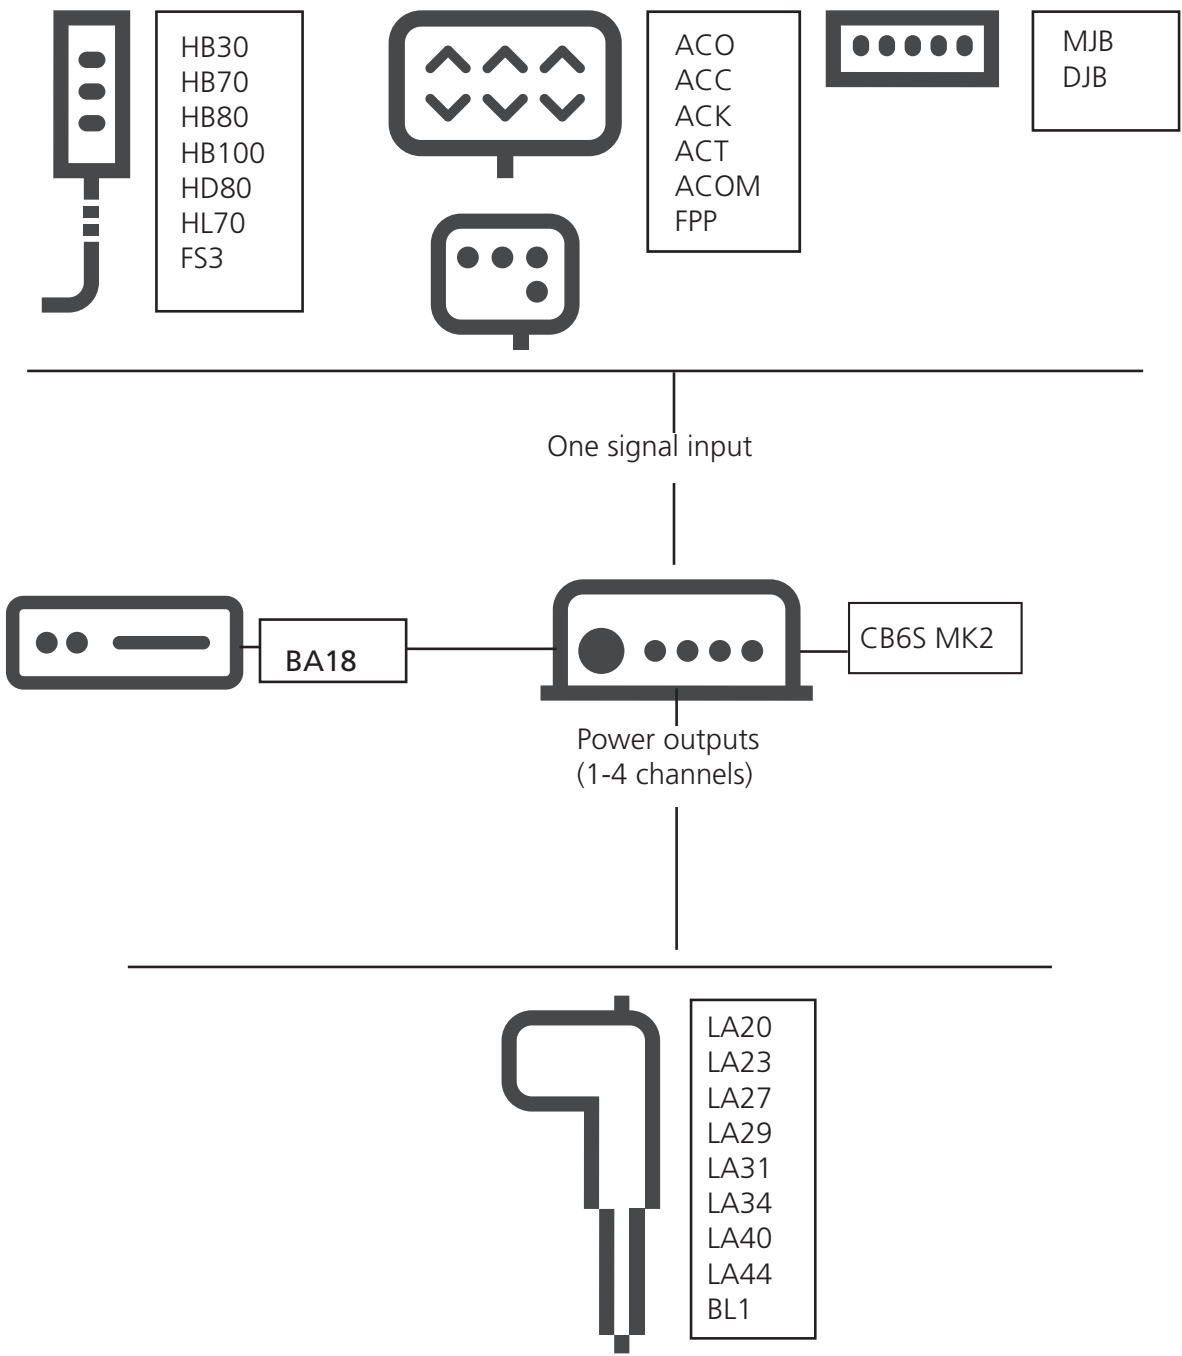

Dimensions

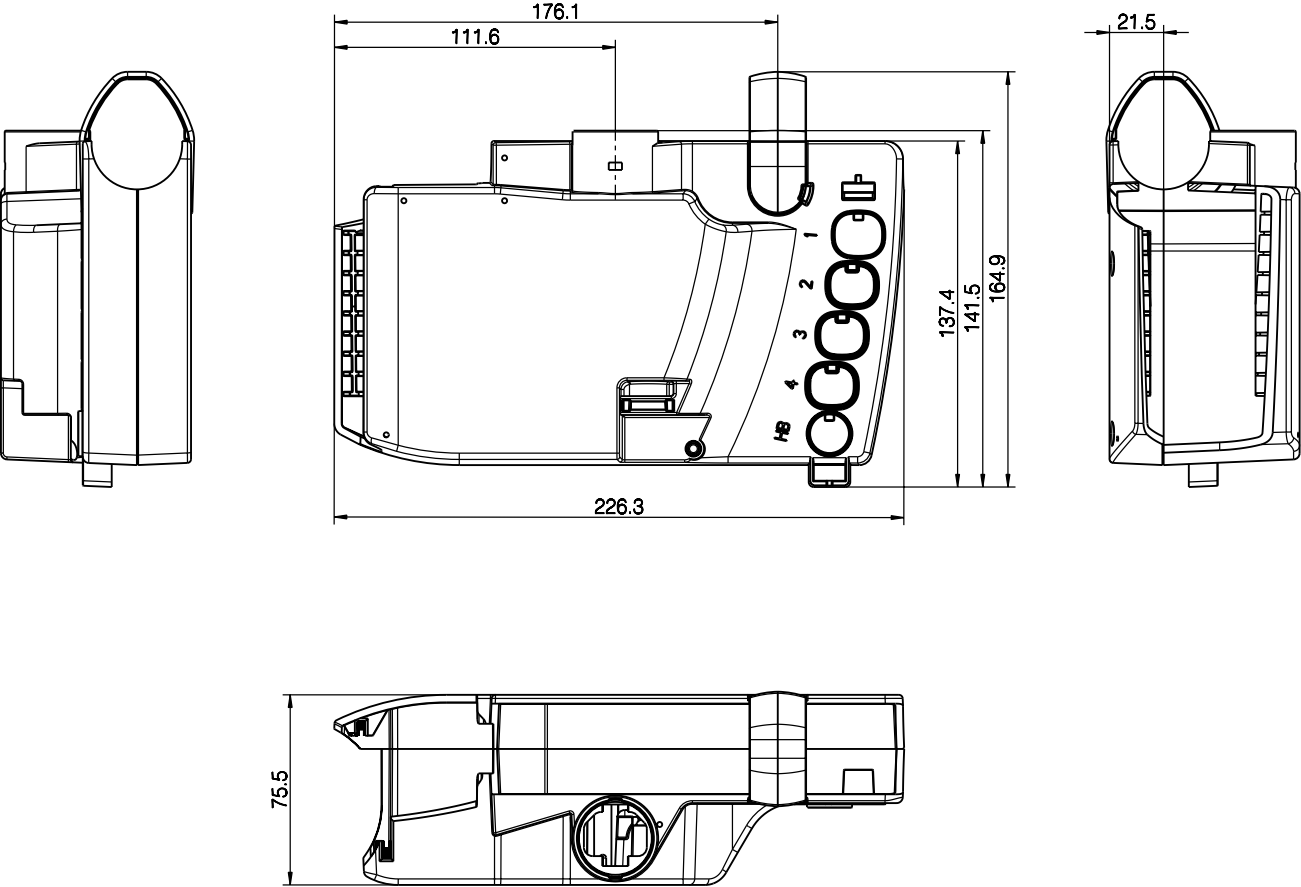


Drawing No.: 9279019

Mounting

Article no. 9271233 (galvanised) + 9271237 (iron oil)

Apart from LA27, it is not possible to mount CB6S MK2 onto LINAK actuators. In such case, you need a CB6 mounting bracket which can be welded or similar to the application. This bracket is shown below:

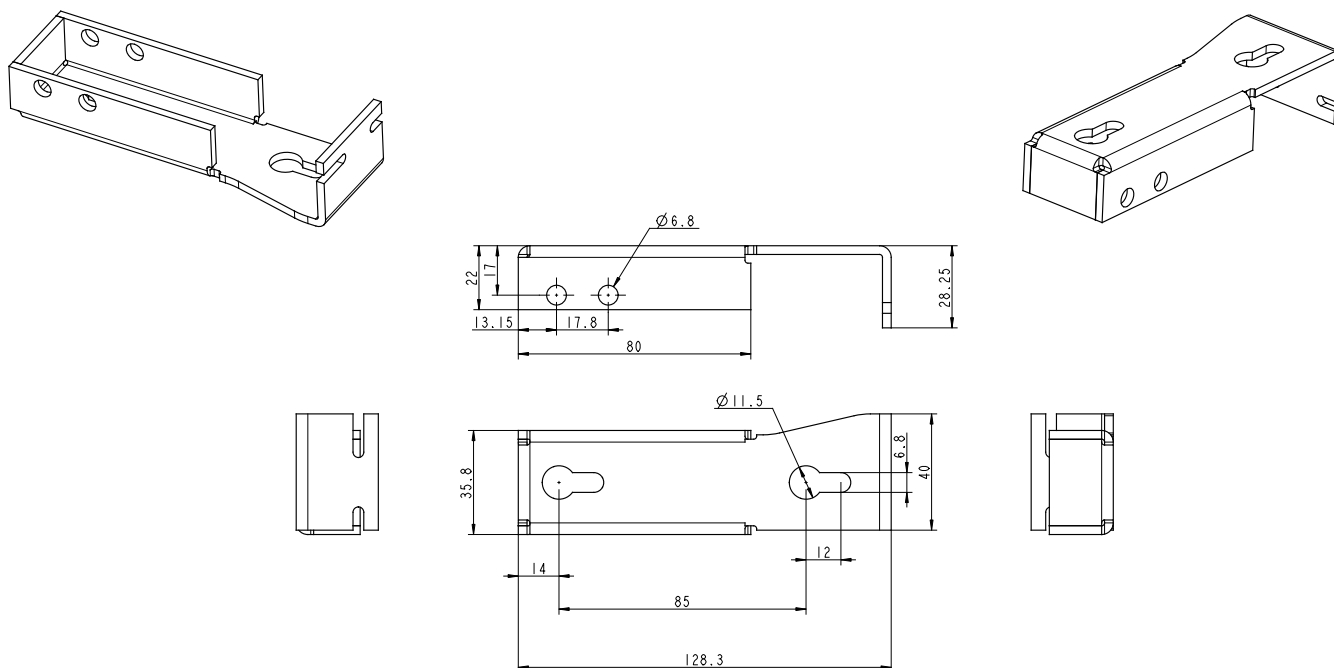

Drawing No.: 9271233

Contacts

FACTORIES

Denmark - Headquarters

LINAK A/S

Phone: +45 73 15 15 15

Fax: +45 74 45 80 48

Fax (Sales): +45 73 15 16 13

Web: www.linak.com

China

LINAK (Shenzhen) Actuator Systems, Ltd.

Phone: +86 755 8610 6656

Phone: +86 755 8610 6990

Web: www.linak.cn

Slovakia

LINAK Slovakia s.r.o.

Phone: +421 51 7563 444

Web: www.linak.sk

Thailand

LINAK APAC Ltd.

Phone: +66 33 265 400

Web: www.linak.com

USA

LINAK U.S. Inc.

Americas Headquarters

Phone: +1 502 253 5595

Fax: +1 502 253 5596

Web: www.linak-us.com

www.linak-latinamerica.com

SUBSIDIARIES

Australia

LINAK Australia Pty. Ltd

Phone: +61 3 8796 9777

Fax: +61 3 8796 9778

E-mail: sales@linak.com.au

Web: www.linak.com.au

Austria

LINAK Zweigniederlassung - Österreich (Wien)

Phone: +43 (1) 890 7446

Fax: +43 (1) 890 744615

E-mail: info@linak.de

Web: www.linak.at - www.linak.hu

Belgium

LINAK Actuator-Systems NV/SA

(Belgium & Luxembourg)

Phone: +32 (0)9 230 01 09

E-mail: beinfo@linak.be

Web: www.linak.be - www.fr.linak.be

Brazil

LINAK Do Brasil Comércio De Atuadores Ltda.

Phone: +55 (11) 2832 7070

Fax: +55 (11) 2832 7060

E-mail: info@linak.com.br

Web: www.linak.com.br

Canada

LINAK Canada Inc.

Phone: +1 502 253 5595

Fax: +1 416 255 7720

E-mail: info@linak.ca

Web: www.linak-us.com

Czech Republic

LINAK C&S s.r.o.

Phone: +42 058 174 1814

Fax: +42 058 170 2452

E-mail: info@linak.cz

Web: www.linak.cz - www.linak.sk

Denmark - International

LINAK International

Phone: +45 73 15 15 15

E-mail: info@linak.com

Web: www.linak.com

Denmark - Sales

LINAK Danmark A/S

Phone: +45 86 80 36 11

Fax: +45 86 82 90 51

E-mail: linak@linak-silkeborg.dk

Web: www.linak.dk

Finland

LINAK OY

Phone: +358 10 841 8700

E-mail: linak@linak.fi

Web: www.linak.fi

France

LINAK France E.U.R.L

Phone: +33 (0) 2 41 36 34 34

Fax: +33 (0) 2 41 36 35 00

E-mail: linak@linak.fr

Web: www.linak.fr

Germany

LINAK GmbH

Phone: +49 6043 9655 0

Fax: +49 6043 9655 60

E-mail: info@linak.de

Web: www.linak.de

India

LINAK A/S India Liaison Office

Phone: +91 120 4531797

Fax: +91 120 4786428

E-mail: info@linak.in

Web: www.linak.in

Ireland

LINAK UK Limited (Ireland)

Phone: +44 (0)121 544 2211

Fax: +44 (0)121 544 2552

+44 (0)796 855 1606 (UK Mobile)

+35 387 634 6554 (Rep.of Ireland Mobile)

E-mail: sales@linak.co.uk

Web: www.linak.co.uk

Italy

LINAK ITALIA S.r.l.

Phone: +39 02 48 46 33 66

Fax: +39 02 48 46 82 52

E-mail: info@linak.it

Web: www.linak.it

Japan

LINAK K.K.

Phone: 81-45-533-0802

Fax: 81-45-533-0803

E-mail: linak@linak.jp

Web: www.linak.jp

Malaysia

LINAK Actuators Sdn. Bhd.

Phone: +60 4 210 6500

Fax: +60 4 226 8901

E-mail: info@linak-asia.com

Web: www.linak.my

Netherlands

LINAK Actuator-Systems B.V.

Phone: +31 76 5 42 44 40 /

+31 76 200 11 10

E-mail: info@linak.nl

Web: www.linak.nl

New Zealand

LINAK New Zealand Ltd

Phone: +64 9580 2071

Fax: +64 9580 2072

E-mail: nzsales@linak.com.au

Web: www.linak.com.au

Norway

LINAK Norge AS

Phone: +47 32 82 90 90

E-mail: info@linak.no

Web: www.linak.no

Poland

LINAK Polska

LINAK Danmark A/S (Spółka Akcyjna)

Phone: +48 22 295 09 70 /

+48 22 295 09 71

E-mail: info@linak.pl

Web: www.linak.pl

Republic of Korea

LINAK Korea Ltd.

Phone: +82 2 6231 1515

Fax: +82 2 6231 1516

E-mail: info@linak.kr

Web: www.linak.kr

Slovakia

LINAK Slovakia S.R.O.

Phone: +421 51 7563 444

Web: www.linak.sk

Spain

LINAK Actuadores, S.L.u

Phone: +34 93 588 27 77

Fax: +34 93 588 27 85

E-mail: esma@linak.es

Web: www.linak.es

Sweden

LINAK Scandinavia AB

Phone: +46 8 732 20 00

Fax: +46 8 732 20 50

E-mail: info@linak.se

Web: www.linak.se

Switzerland

LINAK AG

Phone: +41 43 388 31 88

Fax: +41 43 388 31 87

E-mail: info@linak.ch

Web: www.linak.ch - www.fr.linak.ch

www.it.linak.ch

Taiwan

LINAK (Shenzhen) Actuator systems Ltd.

Taiwan Representative office

Phone: +886 2 272 90068

Fax: +886 2 272 90096

E-mail: sales@linak.com.tw

Web: www.linak.com.tw

Turkey

LINAK İth. İhr. San. ve Tic. A.Ş.

Phone: +90 312 4726338

Fax: +90 312 4726635

E-mail: info@linak.com.tr

Web: www.linak.com.tr

United Kingdom

LINAK UK Limited

Phone: +44 (0)121 544 2211

Fax: +44 (0)121 544 2552

E-mail: sales@linak.co.uk

Web: www.linak.co.uk

DISTRIBUTORS

Argentina

Novotec Argentina SRL

Phone: 011-4303-8989 / 8900

Fax: 011-4032-0184

E-mail: info@novotecargentina.com

Web: www.novotecargentina.com

Colombia

MEM Ltda

Phone: +[57] (1) 334-7666

Fax: +[57] (1) 282-1684

E-mail: servicioalcliente@memltda.com.co

Web: www.mem.net.co

India

Mechatronics Control Equipments India Pvt Ltd

Phone: +91-44-28558484, 85

E-mail: bala@mechatronicscontrol.com

Web: www.mechatronicscontrol.com

Indonesia

PT. Himalaya Everest Jaya

Phone: +6 221 544 8956 /+6 221 544 8965

Fax: +6 221 619 1925

Fax (Sales): +6 221 619 4658

E-mail: hejplastic-div@centrin.net.id

Web: www.hej.co.id

Israel

NetivTech LTD

Phone: +972 55-2266-535

Fax: +972 2-9900-560

Email: info@NetivTech.com

Web: www.netivtech.com

Singapore

Servo Dynamics Pte Ltd

Phone: +65 6844 0288

Fax: +65 6844 0070

E-mail: servodynamics@servo.com.sg

South Africa

Industrial Specialised Applications CC

Phone: +27 011 466 0346

E-mail: gartht@isagroup.co.za

Web: www.isaza.co.za

United Arab Emirates

Mechatronics

Phone: +971 4 267 4311

Fax: +971 4 267 4312

E-mail: mechtron@emirates.net.ae

Terms of use

LINAK® takes great care in providing accurate and up-to-date information on its products. However, the user is responsible for determining the suitability of LINAK products for a specific application. Due to continual development, LINAK products are subject to frequent modifications and changes. LINAK reserves the rights to conduct modifications, updates, and changes without any prior notice. For the same reason, LINAK cannot guarantee the correctness and actual status of imprinted information on its products.

LINAK uses its best efforts to fulfil orders. However, for the reasons mentioned above, LINAK cannot guarantee availability of any particular product at any given time. LINAK reserves the right to discontinue the sale of any product displayed on its website or listed in its catalogues or in other written material created and produced by LINAK, LINAK subsidiaries, or LINAK affiliates. All sales are subject to the 'Standard Terms of Sale and Delivery for LINAK A/S' available on LINAK websites. LINAK and the LINAK logotype are registered trademarks of LINAK A/S. All rights reserved.