

Battery Pack BAJ Li-Ion Data Sheet



Contents

Introduction..... 3

Features and Options 4

Usage 5

Ordering example 6

Dimensions 7

Front covers..... 8

Contacts 9

Introduction



The Li-Ion battery pack BAJL has been specially developed for use with the JUMBO system for patient lifts and sit-to-stand lifts. It is a lightweight battery with reliable and high performance.

The BAJL battery is based on lithium-ion technology. This technology helps reduce waste as fewer batteries need to be scrapped. This also means that less transportation of batteries is required. Moreover, the lower battery weight improves work-life ergonomics.

All comparisons refer to lead-acid batteries, BAJ.

Further advantages by use of the BAJL are:

- Increased service life
- Easy mounting and replacement of the battery via snap system
- Indication when charging is necessary via control box or hand control
- Easy and flexible charging

Features and options

Lithium-ion technology:	Type 1 + 2: Lithium Iron Phosphate (LFP)
Lifetime:	Up to 4 times longer depending on the usage (compared to lead acid)
Output voltage:	24 V DC
Housing colour:	Standard dark grey bottom (RAL 7016) and light grey top (RAL 7035) Optional light grey bottom (RAL 7035)
Protection class:	IPX5 (only when mounted according to mounting instruction)
Front covers:	Standard or customised
Packaging:	Every battery is packed individually in UN38.3-approved packaging

Specifications

	Standard capacity	High capacity
Type (see Ordering Example)	Type 1	Type 2
Capacity	3.3 Ah	6.6 Ah
Weight	1.5 kg	2.2 kg
Cycles per charge (lifts/lowerings)	60	120
Charging time (approx.)	4 - 5 h	10 h
Energy	84 Wh	169 Wh

Number of lifts and lowerings with a fully charged battery under the following conditions: Normal speed (CBJ Care and LA44), thrust up to 6,000 N

Stroke: $S = 200$ mm. The actuator does not reach the end position at any time.

Usage

Compatibility:	CBJ Care, CBJ2, COBO, CHJ2 and CH01
Duty cycle:	5%, 1 minute continuous use followed by 19 minutes not in use 10 % 2 minutes continuous use followed by 18 minutes not in use (for type 1, 3.3 Ah, type 2 6.6 Ah)
Charging:	Via JUMBO wall charger CHJ2 or via JUMBO control box with integrated charger
Charging time:	3 to 4 hours
Charging state:	Maximum 30% when shipped from LINAK
Recharging during storage:	Recharge the battery 6 months at the latest after production date stated on the label
Operating temperature:	+5 °C to +40 °C
Charging temperature:	+10 °C to +40 °C
Storage temperature:	-10 °C to +40 °C (+10 °C to +25 °C - recommended) The batteries must be stored in an applicable storage room without direct sunlight.
Relative humidity:	20% to 80% - non-condensing
Atmospheric pressure:	700 hPa to 1060 hPa
Height above sea level:	Max. 3000 meters
Approvals:	IEC60601-1:2005 3rd edition, ANSI / AAMI ES60601-1:2005, 3rd edition, CAN / CSA-22.2 No 60601-1:2008, IEC62133 2nd edition, UL2054, 2nd edition PSE (pending) UN38.3, 6th edition (needed for transportation of lithium batteries)

Ordering example

BAJ L 00 1 1 00 0 0 xx 1

IP protection

1 = IPX5

Frontplate no.

See the front cover table for details

xx (last 2 digits)

Type	Colour	Front cover no.	Front cover	Capacity Ah
BAJL Li-Ion	Blue	47	00J1BA047	3.3
BAJL Li-Ion High	Blue	48	00J1BA048	6.6

Color of bottom part

0 = RAL7016, dark grey (standard)

1 = RAL7035, light grey

0 = Not used

00 = Not used

0 = Not used

Energy

1 = 3.3 Ah BAJL

2 = 6.6 Ah BAJL

Ampere-hour (Ah) rounded to the nearest whole point number

Options

00 = Standard


Type

L = Li-Ion battery pack

84 pcs. correspond to a half pallet, 168 pcs. correspond to a Euro-pallet.

Dimensions

All dimensions are in mm.

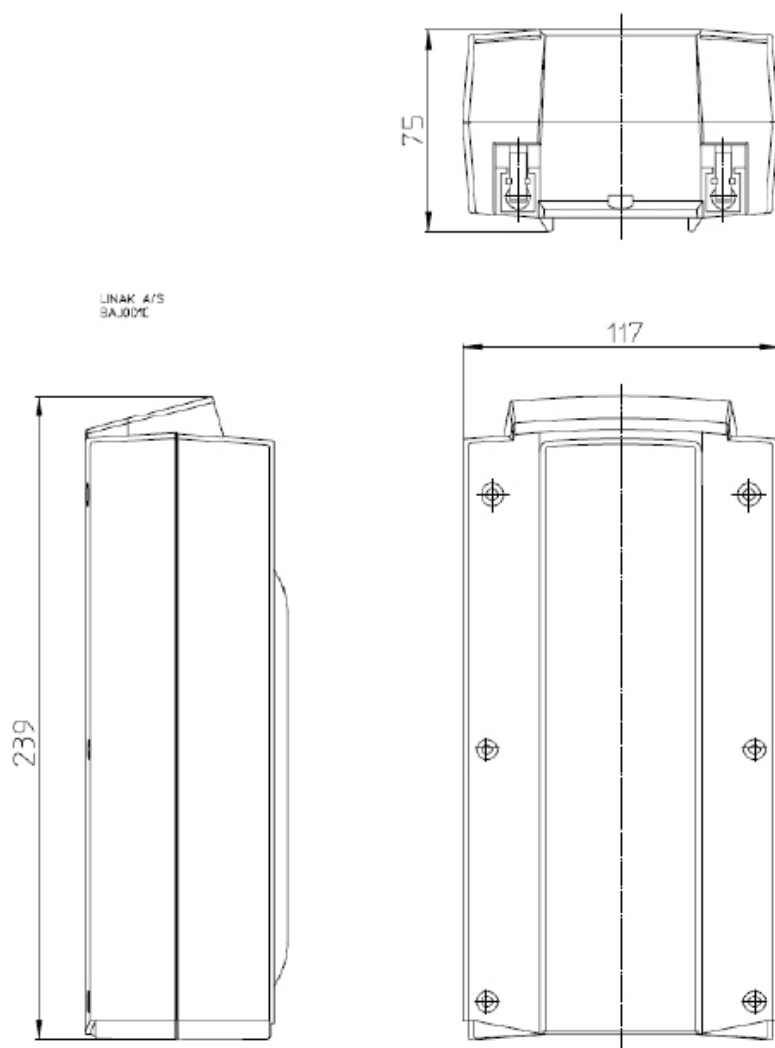

Drawing no.: BAJ001C

LINAK® will remedy defective Li-Ion batteries built into LINAK products in accordance with the terms stipulated in the LINAK Li-Ion battery disclaimer available on the LINAK website. LINAK explicitly disclaims all other remedies and liability.

Front covers

Li-Ion
00J1BA047



3.3 Ah

Li-Ion
00J1BA048



6.6 Ah

Contacts

FACTORIES

DENMARK - HEADQUARTERS

LINAK A/S
PHONE: +45 73 15 15 15
FAX: +45 74 45 80 48
FAX (SALES): +45 73 15 16 13
WWW.LINAK.COM

CHINA

LINAK (SHENZHEN) ACTUATOR SYSTEMS, LTD.
PHONE: +86 755 8610 6656
PHONE: +86 755 8610 6990
WWW.LINAK.CN

SLOVAKIA

LINAK SLOVAKIA S.R.O.
PHONE: +421 51 7563 444
WWW.LINAK.SK

THAILAND

LINAK APAC LTD.
PHONE: +66 33 265 400
WWW.LINAK.COM

USA

LINAK U.S. INC.
AMERICAS HEADQUARTERS
PHONE: +1 502 253 5595
FAX: +1 502 253 5596
WWW.LINAK-US.COM
WWW.LINAK-LATINAMERICA.COM

SUBSIDIARIES

Australia

LINAK Australia Pty. Ltd
PHONE: +61 3 8796 9777
FAX: +61 3 8796 9778
E-mail: sales@linak.com.au
www.linak.com.au

Austria

LINAK Zweigniederlassung - Österreich (Wien)
PHONE: +43 (1) 890 7446
FAX: +43 (1) 890 744615
E-mail: info@linak.de
www.linak.at - www.linak.hu

Belgium

LINAK Actuator-Systems NV/SA
(Belgium & Luxembourg)
PHONE: +32 (0)9 230 01 09
E-mail: beinfo@linak.be
www.linak.be - www.fr.linak.be

Brazil

LINAK Do Brasil Comércio De Atuadores Ltda.
PHONE: +55 (11) 2832 7070
FAX: +55 (11) 2832 7060
E-mail: info@linak.com.br
www.linak.com.br

Canada

LINAK Canada Inc.
PHONE: +1 502 253 5595
FAX: +1 416 255 7720
E-mail: info@linak.ca
www.linak-us.com

Czech Republic

LINAK C&S s.r.o.
PHONE: +42 058 174 1814
FAX: +42 058 170 2452
E-mail: info@linak.cz
www.linak.cz - www.linak.sk

Denmark - International

LINAK International
PHONE: +45 73 15 15 15
E-mail: info@linak.com
www.linak.com

Denmark - Sales

LINAK DANMARK A/S
PHONE: +45 86 80 36 11
FAX: +45 86 82 90 51
E-mail: linak@linak-silkeborg.dk
www.linak.dk

Finland

LINAK OY
PHONE: +358 10 841 8700
E-mail: linak@linak.fi
www.linak.fi

France

LINAK FRANCE E.U.R.L.
PHONE: +33 (0) 2 41 36 34 34
FAX: +33 (0) 2 41 36 35 00
E-mail: linak@linak.fr
www.linak.fr

Germany

LINAK GmbH
PHONE: +49 6043 9655 0
FAX: +49 6043 9655 60
E-mail: info@linak.de
www.linak.de

India

LINAK A/S India Liaison Office
PHONE: +91 120 4531797
FAX: +91 120 4786428
E-mail: info@linak.in
www.linak.in

Ireland

LINAK UK Limited (Ireland)
PHONE: +44 (0)121 544 2211
FAX: +44 (0)121 544 2552
+44 (0)796 855 1606 (UK Mobile)
+35 387 634 6554
(Republic of Ireland Mobile)
E-mail: sales@linak.co.uk
www.linak.co.uk

Italy

LINAK ITALIA S.r.l.
PHONE: +39 02 48 46 33 66
FAX: +39 02 48 46 82 52
E-mail: info@linak.it
www.linak.it

Japan

LINAK K.K.
PHONE: 81-45-533-0802
FAX: 81-45-533-0803
E-mail: linak@linak.jp
www.linak.jp

Malaysia

LINAK Actuators Sdn. Bhd.
PHONE: +60 4 210 6500
FAX: +60 4 226 8901
E-mail: info@linak-asia.com
www.linak.my

Netherlands

LINAK Actuator-Systems B.V.
PHONE: +31 76 5 42 44 40 /
+31 76 200 11 10
E-mail: info@linak.nl
www.linak.nl

New Zealand

LINAK New Zealand Ltd
PHONE: +64 9580 2071
FAX: +64 9580 2072
E-mail: nzsales@linak.com.au
www.linak.com.au

Norway

LINAK Norge AS
PHONE: +47 32 82 90 90
E-mail: info@linak.no
www.linak.no

Poland

LINAK Polska
LINAK Danmark A/S (Spółka Akcyjna)
PHONE: +48 22 295 09 70 /
+48 22 295 09 71
E-mail: info@linak.pl
www.linak.pl

Republic of Korea

LINAK Korea Ltd.
PHONE: +82 2 6231 1515
FAX: +82 2 6231 1516
E-mail: info@linak.kr
www.linak.kr

Slovakia

LINAK SLOVAKIA S.R.O.
PHONE: +421 51 7563 444
www.linak.sk
Spain
LINAK Actuadores, S.L.u
PHONE: +34 93 588 27 77
FAX: +34 93 588 27 85
E-mail: esma@linak.es
www.linak.es

Sweden

LINAK Scandinavia AB
PHONE: +46 8 732 20 00
FAX: +46 8 732 20 50
E-mail: info@linak.se
www.linak.se

Switzerland

LINAK AG
PHONE: +41 43 388 31 88
FAX: +41 43 388 31 87
E-mail: info@linak.ch
www.linak.ch - www.fr.linak.ch
www.it.linak.ch

Taiwan

LINAK (Shenzhen) Actuator systems Ltd.
Taiwan Representative office
PHONE: +886 2 272 90068
FAX: +886 2 272 90096
E-mail: sales@linak.com.tw
www.linak.com.tw

Turkey

LINAK İth. İhr. San. ve Tic. A.Ş.
PHONE: +90 312 4726338
FAX: +90 312 4726635
E-mail: info@linak.com.tr
www.linak.com.tr

United Kingdom

LINAK UK Limited
PHONE: +44 (0)121 544 2211
FAX: +44 (0)121 544 2552
E-mail: sales@linak.co.uk
www.linak.co.uk

Argentina

NOVOTEC ARGENTINA SRL
PHONE: 011-4303-8989 / 8900
FAX: 011-4032-0184
E-mail: info@novotecargentina.com
www.novotecargentina.com

Colombia

MEM Ltda
PHONE: +[57] (1) 334-7666
FAX: +[57] (1) 282-1684
E-mail: servicioalcliente@memltda.com.co
www.mem.net.co

India

Mechatronics Control Equipments India Pvt Ltd
PHONE: +91-44-28558484, 85
E-mail: bala@mechatronicscontrol.com
www.mechatronicscontrol.com

Indonesia

PT. HIMALAYA EVEREST JAYA
PHONE: +6 221 544 8956,
+6 221 544 8965
FAX: +6 221 619 1925
Fax (Sales): +6 221 619 4658
E-mail: hejplastic-div@centrin.net.id
www.hej.co.id

Israel

NetivTech LTD
PHONE: +972 55-2266-535
FAX: +972 2-9900-560
Email: info@NetivTech.com
www.netivtech.com

Singapore

Servo Dynamics Pte Ltd
PHONE: +65 6844 0288
FAX: +65 6844 0070
E-mail: servodynamics@servo.com.sg

South Africa

Industrial Specialised Applications CC
PHONE: +27 011 466 0346
E-mail: gartht@isagroup.co.za
www.isaza.co.za

United Arab Emirates

Mechatronics
PHONE: +971 4 267 4311
FAX: +971 4 267 4312
E-mail: mechtron@emirates.net.ae

DISTRIBUTORS

Terms of use

LINAK® takes great care in providing accurate and up-to-date information on its products. However, the user is responsible for determining the suitability of LINAK products for a specific application. Due to continual development, LINAK products are subject to frequent modifications and changes. LINAK reserves the rights to conduct modifications, updates, and changes without any prior notice. For the same reason, LINAK cannot guarantee the correctness and actual status of imprinted information on its products.

LINAK uses its best efforts to fulfil orders. However, for the reasons mentioned above, LINAK cannot guarantee availability of any particular product at any given time. LINAK reserves the right to discontinue the sale of any product displayed on its website or listed in its catalogues or in other written material created and produced by LINAK, LINAK subsidiaries, or LINAK affiliates. All sales are subject to the 'Standard Terms of Sale and Delivery for LINAK A/S' available on LINAK websites. LINAK and the LINAK logotype are registered trademarks of LINAK A/S. All rights reserved.